

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT EAT, DRINK OR SMOKE WHILE USING.
Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Avoid release to the environment. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor, physician or first aider if you feel unwell.

IF ON SKIN (or hair): Rinse skin with soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists: Get medical advice or attention.

If exposed or concerned: Get medical advice or attention. When seeking medical advice take this container with you. Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)
or call Resene 0800 737 363.

CONTAINS: Zinc Oxide <35 gms/L.

For use as a surface preparation coating.


SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.



Quick Dry
End Seal SDS

Resene

Quick Dry End Seal waterborne exterior/interior

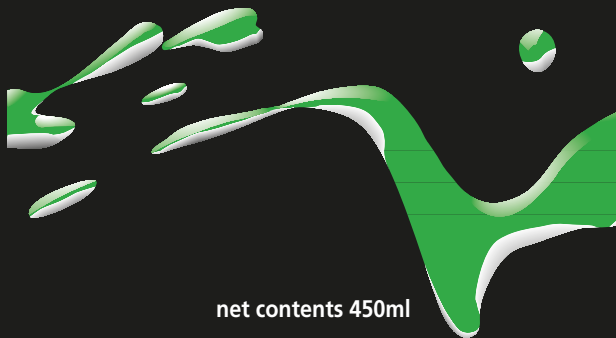

net contents 450ml



9 418022 062462

WHITE

Resene Quick Dry End Seal provides long-term flexibility over unstable substrates coupled with exceptional durability even when left uncoated for prolonged periods.

Preparation

- Ensure all end grains and bare timber areas substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- Waterblasting is the best surface preparation prior to painting of weathered cementitious surfaces.
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80). Efflorescence on masonry **must be treated** (see Data Sheet D83).
- Wherever oil and grease are present, ensure the surface is thoroughly cleaned using Resene Paint Prep and Housewash. Flush clean with water.
- Round all sharp timber edges. Any bare timber surface that has been left exposed to the weather for more than one week must be thoroughly sanded or treated with Resene TimberLock (see Data Sheet D48).
- **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

Application

- Apply one or two coats of Resene Quick Dry End Seal allowing at least two hours between coats. Lightly sand between coats.

Overcoating

- Required if sealed ends are fully exposed to weathering. Can be overcoated with two coats of a range of Resene exterior waterborne and solventborne topcoats.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.

Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. This product complies with all the requirements of an APAS Paint Specification. Refer to the APAS Specification list on the Resene website for full details. Printed using de-inkable toners for recycling with no solvent emissions.



Resene. Licensed
products since 1996