

DYNEX cavityclosers

A comprehensive range of uPVC Cavity Closers suitable for use on drained cavities behind the exterior cladding, that meet the requirements of NZBC Acceptable Solution E2/AS1 paragraph 9.1.8.3.

Designed and made in New Zealand using high quality UV stabilised and 100% recyclable uPVC material. Proudly BRANZ Appraised.

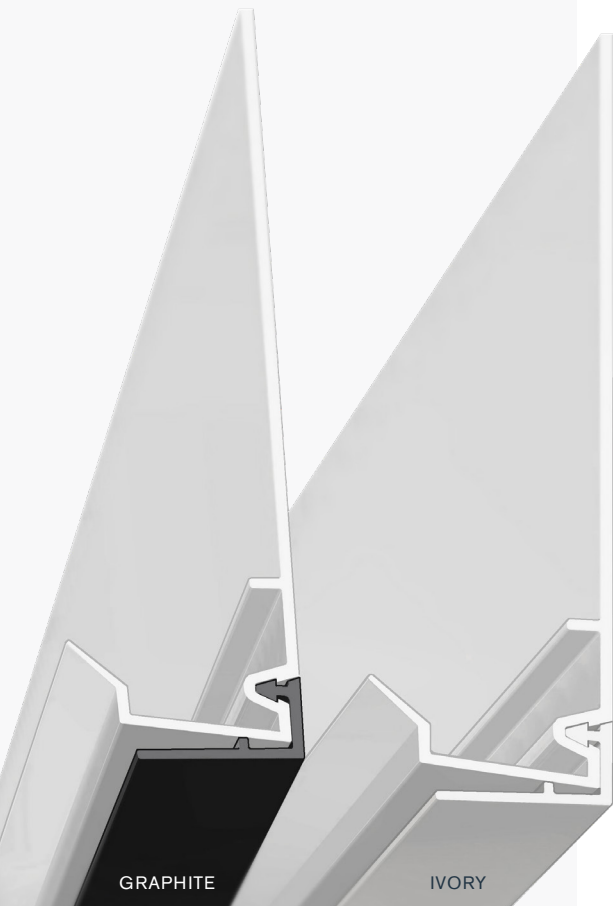


Standard Range

Our standard Cavity Closers are designed with unique innovative features to cover a variety of building applications.

Key features:

- Flexible tip to hide discrepancies in claddings (20mm and raked roof closers)
- Available in 3 metre lengths
- Recyclable materials
- BRANZ appraised
- Designed and made in NZ



Architectural Range













The new architectural Cavity Closers include an integrated coloured cap available in Graphite and Ivory to match cladding and soffit lining finishes. The patented design hides unsightly slots and ventilation holes commonly associated with a drained cavity finish to ensure the aesthetics of your build are not compromised.

Key features









- Two new colours – Graphite and Ivory
- Hidden ventilation slots
- Two sizes – 20mm and 45mm
- Flexible tip to hide discrepancies in claddings
- Available in 3 metre lengths
- Recyclable materials
- BRANZ appraised
- Designed and made in NZ

DYNEX cavityclosers

Standard Range

SIZE	DESCRIPTION	PART NO.	BARCODE
 20mm	Standard 20mm Cavity Closer with an added feature of a soft seal outer lip to close unsightly gaps created by variation in cavity thickness or cladding imperfections.	CAVT020WHT3	 9 421029 070118 >
 20mm Raked roof	Standard 20mm Cavity Closer complete with uniquely designed bulb seal, to hide unsightly gaps on a raked roof created by board lapping. Aids vermin proofing and meeting building code requirements.	CAVT025WHT3	 9 421029 070125 >
 30mm	A thicker stronger Cavity Closer with built-in Cant Strip designed for timber weatherboard applications, that won't crush when the bottom weatherboard is fixed.	CAVT030WHT3	 9 421029 070132 >
 35mm	A thicker stronger Cavity Closer with built-in Cant Strip designed for timber weatherboard applications, that won't crush when the bottom weatherboard is fixed.	CAVT035WHT3	 9 421029 070149 >
 40-50mm	2 in 1 sized cavity closer that can be easily modified from 50mm to 40mm applications.	CAVT040WHT3	 9 421029 070156 >
 45mm	Standard 45mm Cavity Closer with an added feature of a soft outer lip to close unsightly gaps created by variation in cavity thickness or cladding imperfections.	CAVT045WHT3	 9 421029 070200 >

Architectural Range

SIZE	COLOUR	PART NO.	BARCODE
 20mm	IVORY	CAVA020IVR3	 9 421029 070194 >
 20mm	GRAPHITE	CAVA020GRA3	 9 421029 070187 >
 45mm	IVORY	CAVA045IVR3	 9 421029 070217 >
 45mm	GRAPHITE	CAVA045GRA3	 9 421029 070224 >



Contact Dynex for more information or to request a sample.
 PHONE 0800 4 DYNEX (0800 439 639) FAX 0800 737 375

dynex.nz