

Applications;

Fixing Bottom Plates to Concrete.
Temporary fixing, boxing and formwork to concrete.

Features;


75mm Length - Ideal length for fixing 45mm Timber to Concrete.
Low Velocity Pin - Designed to be used in all leading brand piston tools.
22mm Washer Fixed - Washer fixed provides a larger bearing surface for higher loads.
Galvanised Finish - Increased durability.
Ballistic Tip - Machined point provides more consistent penetration.

Performance Information

Allowable Working Load Capacity (32MPa Concrete)

Part No.	Description	Tensile Capacity	Shear Capacity
PXW75 SKU: 4521750	PX DRIVE PIN - With 22mm Metal Washer	0.38kN	0.38kN

Note: Minimum 5 fastenings per fastened unit, Visible Failures must be replaced, Assumes Static Loading, Capacities listed above are allowable working loads and incorporate a factor of safety exceeding 4.

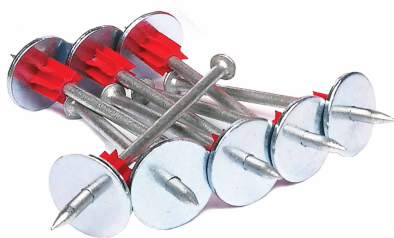

Available from:

PlaceMakers®

SESTO Fasteners LTD®
Head office, 5e Piermark Drive,
Rosedale, Auckland, 0632

Application Specific Design Assistance
Please contact ICCONS® technical engineering department
for specific design applications. engineering@iccons.com.au