

Wireless Inspection Camera with Color LCD Monitor

Your Extended Eyes & Hands!

Allows for easy visual inspection of hard-to-reach areas. Lightweight, handheld design. Easily find, diagnose and solve problems with the flexible extended tube & useful accessories.



Wide range of uses

- Checking for internal leaks around chimney flashing.
- Reading the model number on a furnace fan motor.
- Retrieving a screw lost under the refrigerator.
- Checking the teeth on a kitchen garbage disposal.

And More...

- Reading the service tag on hard-to-reach equipment.
- Inspecting inside of 2" heat exchanger tubes (boiler)
- Examining AC coils in a residential furnace.
- Finding cabling installed in a closed wall cavity.
- Checking the cold air return for debris.
- Checking for lint build up past the primary filter in a dryer.
- Checking sink connections in a crowded sink space.
- Checking the gas connections under an installed stove.

See it!
Clearly, in narrow spot, even in total darkness or underwater
Find it!
Fast, no more struggling with a mirror & torch light
Solve it!
Easily, speed up the solution with extended accessories


SPECIFICATIONS

CAMERA	Mode No .	GB8802
	Imaging Sensor	CMOS
	Total Pixels	704 × 576 (PAL); 712 × 486(NTSC)
	Horizontal View Angle	50 degree
	Transmission Frequency	2468MHz
	Minimum Illumination	0 Lux
	Modulation Type	FM
	Bandwidth	18MHz
	Power Supply	4 x AA batteries
	Unobstructed Effective Range	10m
	Waterproof Capacity	IP67(only for imager head)
	Dimensions(W × D × H)	186 x 145 x 41(mm)(Exclude Flexible Tube)
	Weight(about)	530g
MONITOR	Mode No .	GB7307
	LCD Screen Type	3.5 " TFT-LCD
	Effective Pixels	320(R.G.B.) × 240
	Video System	PAL/NTSC
	Transmission Frequency	2414MHz,243 2MHz,2450M Hz,2468MHz
	Exterior Supply Voltage	5V _{DC}
	Consumption Current (Max.)	500mA
	Charge Time	3 hours
	Work Time	2 hours
	Picture/Video Pixels	640 x 480
	Video Size	27M byte/minute
	Frame Rate	30 frame/second
	Video Output Level	0.9-1.3V _{pp} @75ohm
	Receiving Sensitivity	≤-85dBm
	Dimensions(W x D x H)	100 x70 x 25 (mm)
	Weight(About)	140g
Operating Temperature	-10 °C~+50 °C/+14 °F~+122 °F	
Operating Humidity	15%~85%RH	


INSPECTION TOOL



Review the recorded files on a laptop PC

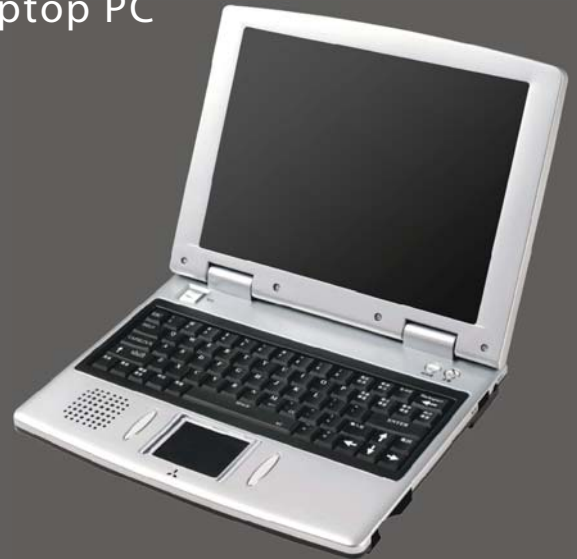

Remove the micro SD card from the monitor

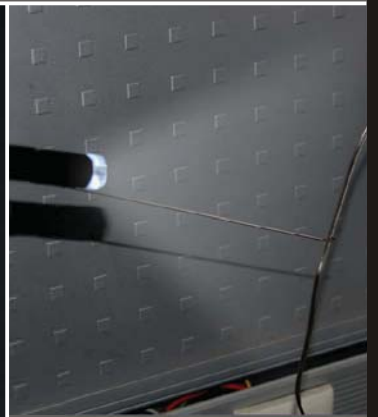

EASY OBSERVATION

