

# Technical Data Sheet

# WEISS™

## HT125-3

3 Room Heat Transfer


with Electronic control

### Dimensions

Cut-out size for inlet fascia 247mm

Cut out size for outlet fascia 155mm

NOTE: THIS DRAWING IS NOT TO SCALE

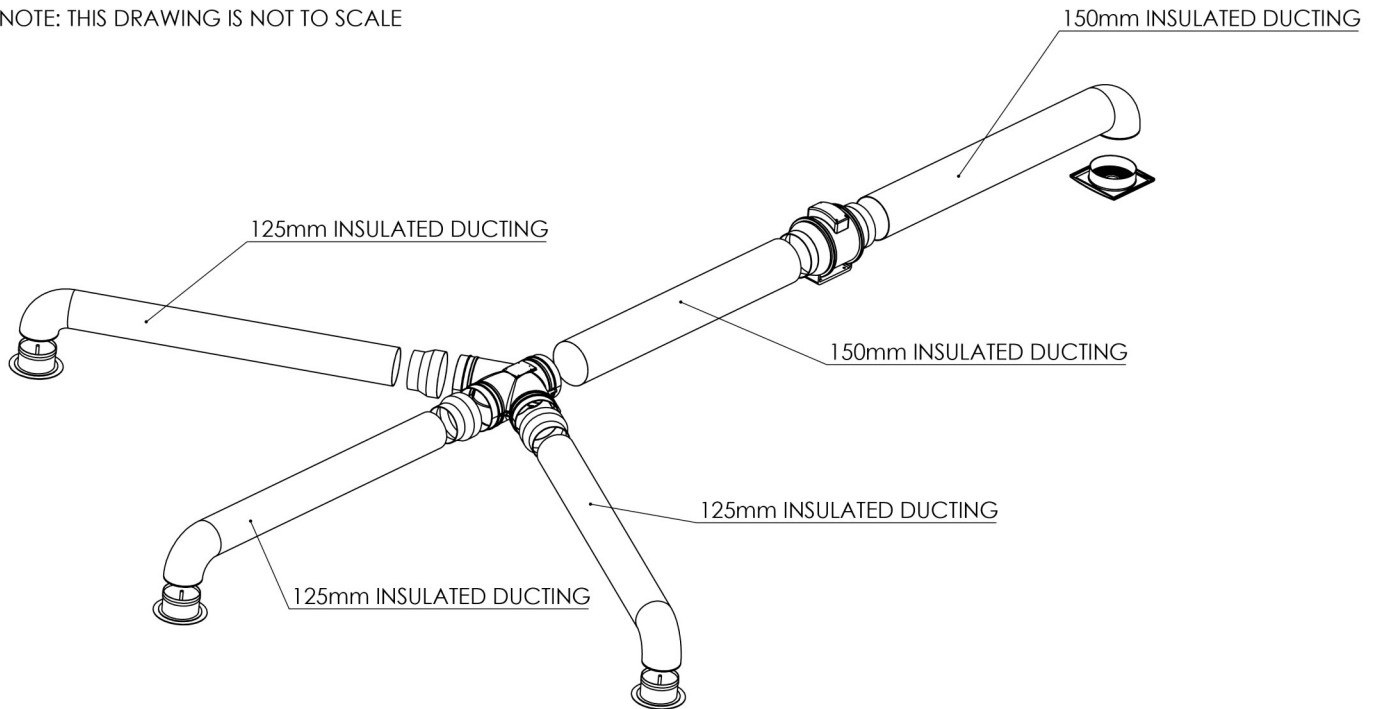

### Specifications

Weight	10.8kg
Colour of front fascia	White
Housing material	FR ABS

### Approval

AS/NZS 3350.2.80:1998 Amdts 1-3 "Electrical Fan"

### Features

- Easy to install
- 15 metres of 150mm insulated ducting supplied
- Unique 'no fuss' all in one unit
- Thermostat included
- Allows warmth to be moved around your home
- Effective temperature control for your home
- All parts are included
- 1 year warranty

# Technical Data Sheet

## Product Use

The HT125-3 is used for the transfer of heat

Typical applications:

- Bathrooms
- Toilets
- Laundries

## Environmental Conditions

Operation	to IEC 721-3-3
Climatic conditions	class 3K5
Temperature	0...+50°C
Humidity	<95% r.h.

## Standards

Test standards	AS/NZS 3350.2.80: 1998 Amdts 1-3 "Electrical Fan"
Test Report no EMC Compliance	SD3175A This is a Level One product with an C frame motor that has a very low risk of causing EMC Interference

## General

Free Air Fan Performance	432m <sup>3</sup> / hr 120 L/sec
Installed decibel rating	47DB

## Ordering

When ordering please give name and type,	
Reference	HT125-3
Barcode	942000490304-5

## Technical Data

Power Supply	230 VAC
Power consumption	max. 0.4Amps
Supply Line fusing	max. 10A
For solid wires	2 x 1.5mm <sup>2</sup>
Motor	230-240VAC 50Hz
Motor insulation class	BF
Total motor wattage	55 Watts
Motor protection	Thermally protected
Total product wattage	55watts