


# AQUERO ALCOVE PIVOT DOOR SHOWERS

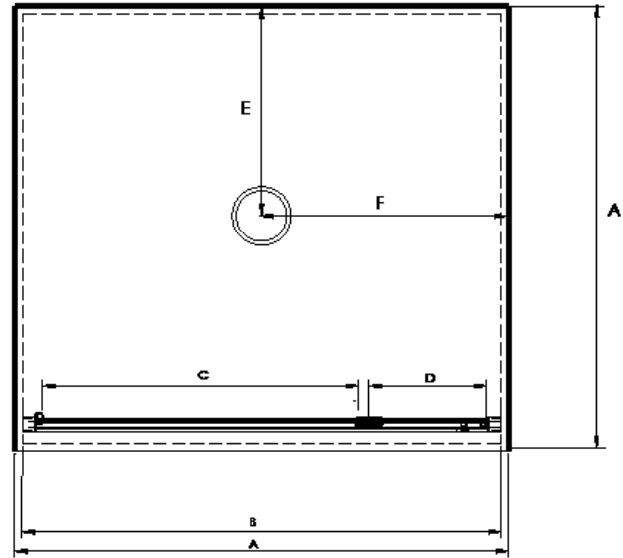

## DESCRIPTION

The Aquero Alcove range of Showers can be purchased as a complete shower cubicle including Acrylic Tray , Wall Liner and Door pack.

The door pack and tray can also be purchased as individual items for installation on a tiled floor and/or wall installation.

## FEATURES

- Low profile tray with 40mm upstand
- 1950mm high glass
- Total OVERALL height 2020mm
- Removeable drip strip and gutter
- Pivot door - Modern 1pc design, 6mm Safety Glass
- Magnetic strip on closing edge of door
- Metal trim on base of glass return
- Polished quality metal chrome handle, inner & outer

## LEGEND

Dimension	Description	Shower Size		
		820mm	900mm	1000mm
A	Tray External Dimension	820mm	900mm	1000mm
B	Door Frame Outer Dimension	795mm	875mm	975mm
C	Door Opening Dimension	624mm	652mm	640mm
D	Centre of Pivot Block to Inside of Frame	88mm	138mm	238mm
E	Waste position Depth	250mm	450mm	500mm
G	Waste Position Width	410mm	450mm	500mm

## ORDERING CODES

Product Description	SKU CODE		
	820mm	900mm	1000mm
Square Alcove 3 sided Flat Wall White Pivot Door	SQ820AQAWHFW	3614477	3614489
Square Alcove 3 sided Flat Wall SILVA Pivot Door	SQ820AQASIFW	3614479	3614491
Square Alcove 3 sided Moulded Back Wall White Pivot Door	SQ820AQAWHMW	3614478	3614490
Square Alcove 3 sided Moulded Back Wall SILVA Pivot Door	SQ820AQASIMW	3614480	3614492
Flat Alcove Tray Only	TFS8X8X8ALCRCW	TFS9X9ALCCW	TFS1000ALCCW
Flat Alcove Wall Liner Only White 1950mm high	LB8X8X8FW3S195	LB9X9X9FW3S195	LB1X1X1FW3S195
Moulded Back Wall / Wall Liner Only White 1950mm high	LB8X8X8MW3S195	LB9X9X9MW3S195	LB1X1X1MW3S195
Pivot Door Only White (reversible opening)	D820WH195	D900WH 195	D1000WH195
Pivot Door Only Silva (reversible opening)	D820SI195	D900SI 195	D1000SI195

## WARRANTY INFORMATION

All bathroomware products supplied by Nouera Shower Systems carry our Quality Assurance and Product Warranty. We use the highest quality materials available and manufacture these in accordance with New Zealand specifications and requirements to ensure that all products are fit for the intended purpose for which they are designed. Our customers peace of mind is of paramount importance to us.

### Warranty Periods

Baths	10 years
Showers	10 years
Shower Screens and Doors	10 years

### Warranty Exclusions

The product must be installed according to the instructions supplied.  
The water supply temperature applied to the product must not exceed 55 degrees Celsius.  
Commercial applications are restricted to a 2 year warranty on all products.



## CLEANING AND MAINTENANCE

Bathroom products are used often and the following is our suggestion on how to clean and care for them.

### Shower Wall

We use Durosan premium quality sanitaryware grade Acrylic. It is, by design, very robust and chemical resistant. A soft damp cloth with non-abrasive cleaners should be used. Use only non-abrasive cleaners that are recommended for acrylic products.

### Shower Tray and Bath

We manufacture our Shower Trays and Baths using a Solid Acrylic Surface. Most other shower trays are manufactured using a veneer acrylic surface. The great advantage is that small scratches can be removed easily by using fine cutting compound. Again, the same basic cleaning methods as the wall are recommended.

### Shower Doors and Glass

All glass is compliant to AS/NZS 2208. We suggest that the glass surfaces are wiped down or squeegeed following use to remove excess water. For best results use a trusted glass cleaner.

### Metal framework

Should be cleaned using a soft damp cloth with non-abrasive cleaner. Note that on round showers, the bottom rollers are easy release for ease of cleaning. If chemical spray cleaners are used, avoid direct contact with the rollers and guides and ensure the shower is rinsed off to avoid residue build up.

### Weather seals and drip strips

Can be removed if required for cleaning, and can be replaced when they no longer look their best. Refer to the spare parts and accessories section of our website for more details.

**Note - If the Glass has been treated follow specific cleaning instructions from the system provider.**