

Satisfy Professional's Needs



Cordless Circular Saw DHS900 / DHS901 235 mm (9-1/4")

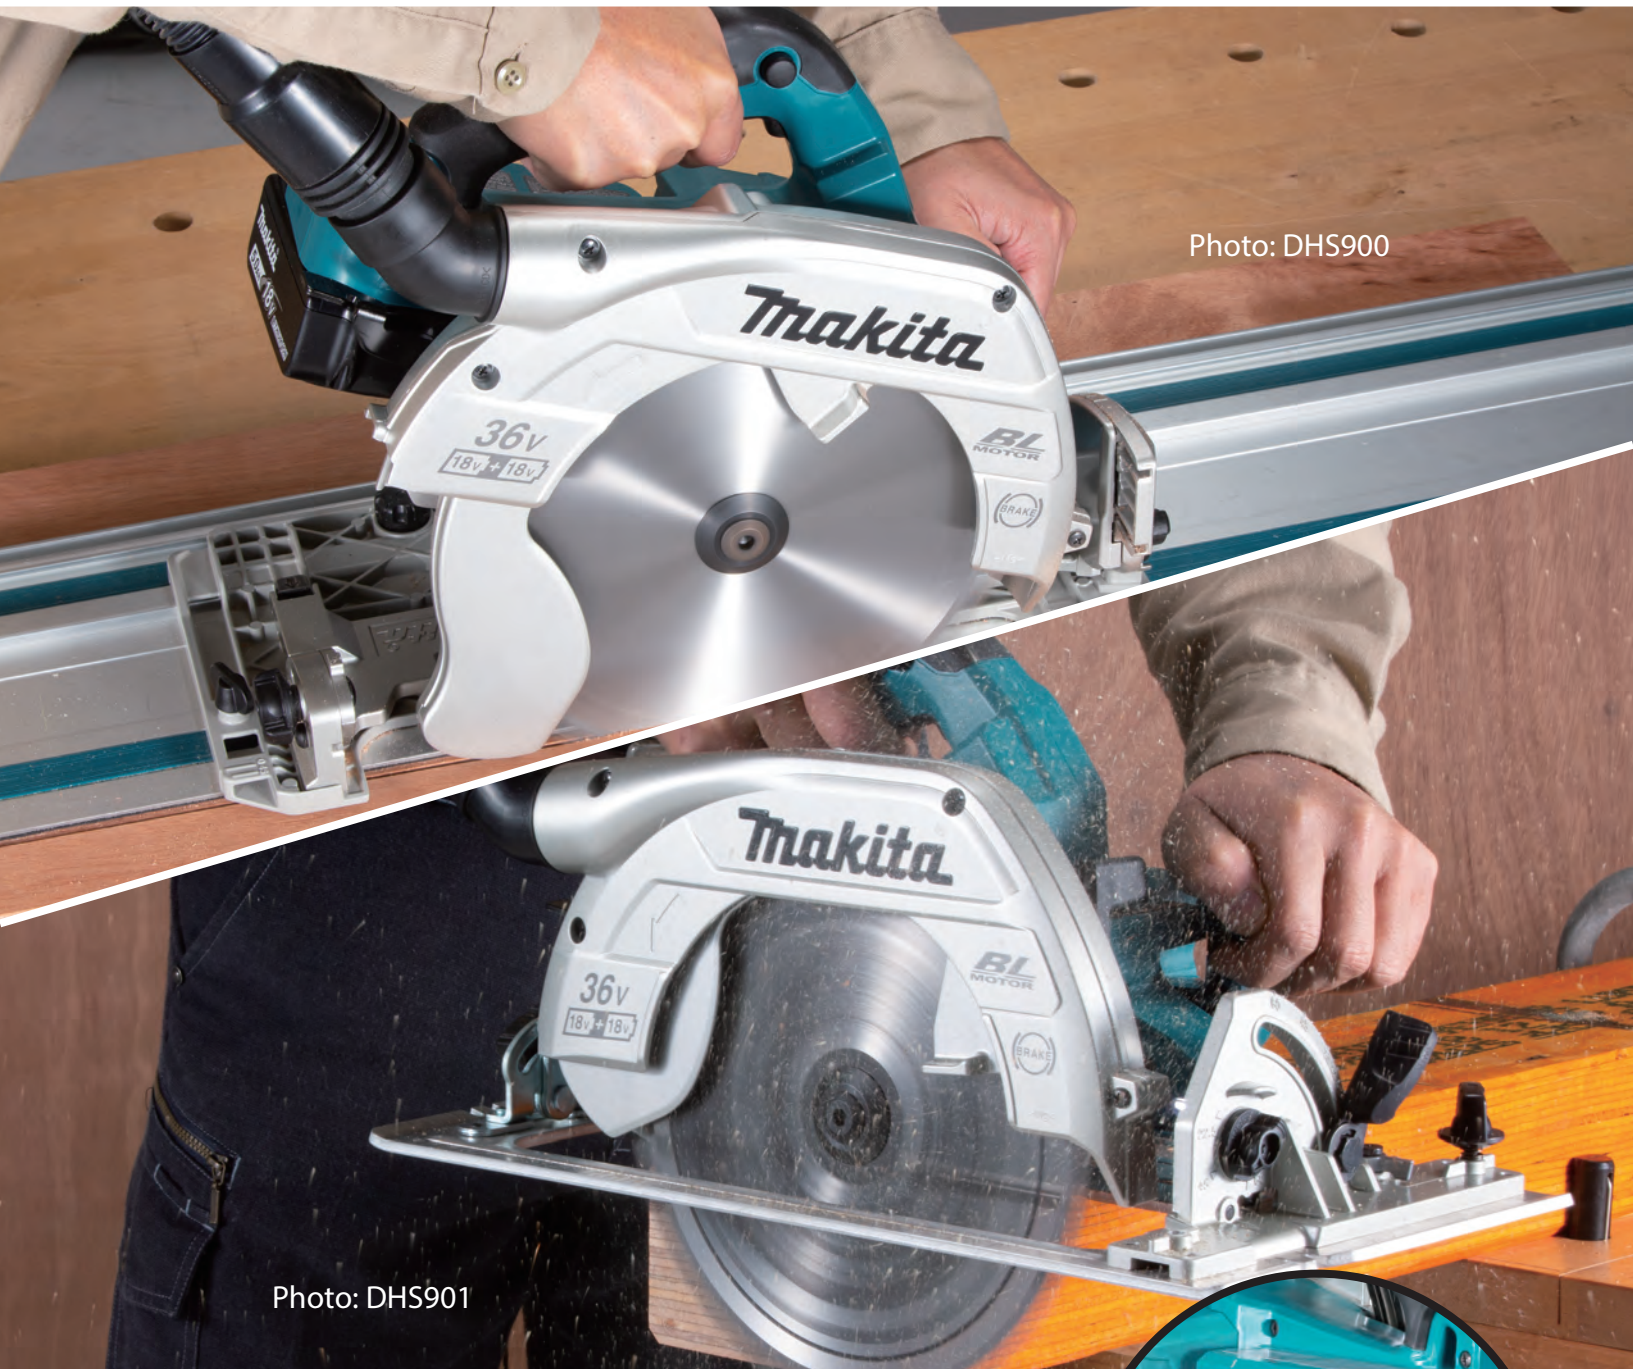


Photo: DHS900

Photo: DHS901

DHS900
Guide rail
Compatible base



DHS901



18v + 18v → 36v

**Work amount
on a single full
battery charge**


110 cuts

Oak wood (Thickness: 80mm / Width: 300mm / Bevel angle: 0°)
with BL1850B (5.0Ah) x 2




Rotatable dust nozzle

diminishes the loss of the convenience of cordless mobility caused by the hose when the saw is connected to a vacuum cleaner.



Lightweight Design

by BL motor, magnesium diecast base, blade case, etc.



Sub Base (DHS900 only)

Guide Rule can be used as Sub Base by turning up side down.

Variable speed control by dial



Blower function



Twin LED Job light



Bevel cuts up to 1° left and 60° right.





photo: DHS900

ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

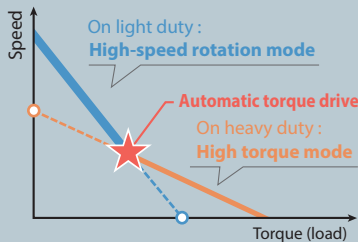

AWS Auto-start Wireless System


The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Wireless unit is compatible with all supported tools

Accessories

Guide rail



Overall length (m)	Part No.
1	199140-0
1.4	194368-5
1.5	199141-8
1.9	194925-9
3	194367-7

Clamp set



Part No. type A: 194385-5
type B: 199826-6

Bevel guide set

Adjustable angle of Guide rail



Part No. 196664-7

Hook set

3"x lumber (65mm) width



Part No. 199386-8

Guide rail bag

For 1.4m, 1.5m Guide rail



Part No. B-57613

Guide rail Joint connector 2pc set



Part No. 198884-9
198885-7(EU)

Specialized EFFICUT blade



Size (mm)	Part No.
235 x 2.2 x 30 x 24T	E-01909



Cordless Circular Saw

DHS900 / DHS901 235 mm (9-1/4")

	DHS900	DHS901
Brake	Yes	Yes
Soft Start	Yes	Yes
Built-in Job Light	Yes	Yes
Carrying Case	Yes	Yes
Blade Diameter	235 mm (9-1/4")	235 mm (9-1/4")
Max Cutting Capacity	90°: 85 mm (3-3/8") 45°: 61 mm (2-3/8") 60°: 44 mm (1-3/4")	90°: 85 mm (3-3/8") 45°: 61 mm (2-3/8") 60°: 41 mm (1-5/8")
No Load Speed (RPM)	4,500	4,500
Vibration Level	Cutting Wood: 2.5 m/s ² or less Cutting Metal: 2.5 m/s ² or less	Cutting Wood: 2.5 m/s ² or less Cutting Metal: 2.5 m/s ² or less
Sound Pressure Level	93 dB(A)	93 dB(A)
Sound Power Level	104 dB(A)	104 dB(A)
Dimensions (L x W x H)	413x196x316 mm (16-1/4"x7-3/4"x12-1/2")	430x224x316 mm (17"x8-7/8"x12-1/2")
Net weight	5.3 - 6.0 kg (11.7 - 13.2 lbs.)	5.8 - 6.4 kg (12.7 - 14.1 lbs.)

Standard Equipment: Wireless Unit (country-specific), TCT Saw Blade, Sub Base (DHS900 only), Guide Rule (DHS901 only), Hex Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery carriage. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201912