

ATTACHED TO YOUR WORLD

MS Adhesives and Sealants range


BRANZ APPRAISED

Bostik MS technology enables high-performance adhesives and sealants to be used in a wide range of applications both indoors and outdoors. These solvent-free, low VOC, low odour products elastically seal most building materials and surfaces. Ideal for green builds, Bostik MS adhesives and sealants are easily applied with low temperature gunning.





Before use refer to current Technical Data Sheet and Safety Data Sheet

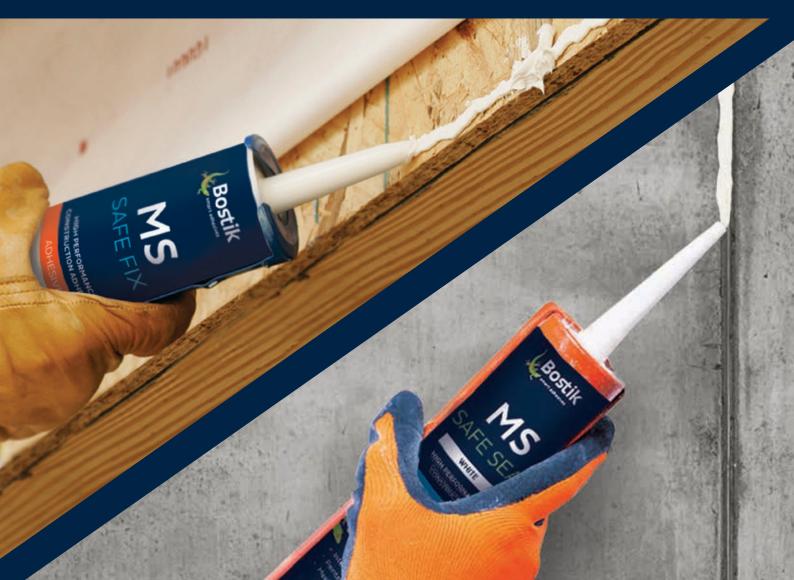

Bostik MS Adhesives and Sealants range



.



BRANZ appraised, multi-purpose, heavy duty, MS-based adhesive for construction & building. Elastically seals most building materials and surfaces. Green Star compliant. Exceptionally high initial grab. Available in cartridge only.

PRODUCT CODE	COLOUR	ТҮРЕ	SIZE	UNITS/CTN	
30605494	White	Cartridge	430g	12	
KEY FEATURES		RECOMMENDED USES			
 BRANZ appraisal 662 for structural loads and durability Ideal for green buildings - Low VOC, odour-free, solvent, silicone and isocyanate-free Exceptionally high initial grab - Ideal when using no mechanical fasteners (check with Bostik technical) Adheres to most common building substrates, polystyrene safe. Easy, low temperature gunning. Highly flexible, paintable, very low shrinkage, non- slump Interior/Exterior - all weather, UV resistant One component 		 General construction adhesive For fixing wall panels, floors, and door frames to most common building substrates. For adhering solvent sensitive substrates (such as mirrors and polystyrene) Elastically bonding different materials with each other Bonding granite, marble and tiles Bonding skirting of many different types 			

MS SAFE SEAL Solvent free, high performance MS construction sealant.

BRANZ appraised, multi-purpose, heavy duty, MS-based sealant for construction & building. Highly elastic and flexible. Green Star compliant - Low VOC, odour-free, isocyanate-free and solvent free. Adheres to most common building substrates. Fully paintable. Available in cartridge and sausage in white, grey and black.

PRODUCT CODE	COLOUR	ТҮРЕ	SIZE	UNITS/CTN	
30605491	White	Cartridge	430g	12	
30804179		Sausage	900g	12	
30605492	Grey	Cartridge	430g	12	
30804013		Sausage	900g	12	
30605493	Black	Cartridge	430g	12	
30804011		Sausage	900g	12	
KEY FEATURES		RECOMMENDED USES			
 Meets NZBC E2/AS1 BRANZ appraised: Appraisal No.705 (2010) ISO 11600/F/25LM compliant Fully paintable to DIN 52452, PT4 		 Sealing of building and expansion joints Sealing in general construction Sealing most building materials Sealing tilt slabs 			

- - Sealing air seals
 - Not designed to seal immersed joints or below-waterline applications
 - Primer: Prep M for non-porous and metal substrates, Prep P for porous substrates



For further information or technical advice on our full range of sealants and adhesives, call 0508 222 272 or email nzsales@bostik.com

Ideal for green buildings

Suitable for LOSP

• Easy to gun and tool

 Total movement 50%(± 25%) Very low shrinkage One component

• Non slump