

# Features & Specification

in sink erator<sup>®</sup>

# dualtap<sup>™</sup>

## DUALTAP DT3010

### Hot & Chilled Water Tap



DT3010 - Chrome  
Product Code: DT3010-CH




DT3010 - Black  
Product Code: DT3010-MBLK



DT3010 - Brushed  
Product Code: DT3010-BR

- Instant filtered near boiling and filtered chilled water.
- Gentle touch, two lever dispenser
- Spring loaded return safety mechanism
- Elegant swivelling spout. Tap insulated from heat.
- Tap mounted on either the kitchen work surface or sink. (35mm-38mm hole required in bench)
- Reduce chlorine, lead, and other unpleasant tastes, chemicals and odours from the water.
- Easy to install 2.5 litre stainless steel NeoTank.
- Easy to install 5 litre NeoChiller
- Both tanks plug directly into electrical sockets close to appliance.
- 3-Year Warranty.



NeoTank<sup>®</sup>, NeoChiller<sup>®</sup>, filter and full installation kit included.

Please note these products are for domestic use only and the warranty is void if installed in a commercial application.



ITALIAN TAPWARE

in sink erator<sup>®</sup>  
**dualtap<sup>™</sup>**


# NeoTank® Specifications

in sink erator™

# NeoTank™



- NeoTank is only about the size of a toaster, making it easy to hang on the back wall under your kitchen bench with minimum fuss.
- The 2.5 litre capacity is easily sufficient for most kitchen tasks while reducing the heating requirement and saving you energy costs.
- Finger-tip control with a touch-panel display for precise temperature adjustment.
- Able to run on a standard electrical circuit drawing 5.6AMPs with an element size of 1.3KW.
- Quiet, energy-efficient operation.
- Easy installation with tool-free connections and dry-start protection.
- Standard 3-pin plug that plugs straight into a wall socket.

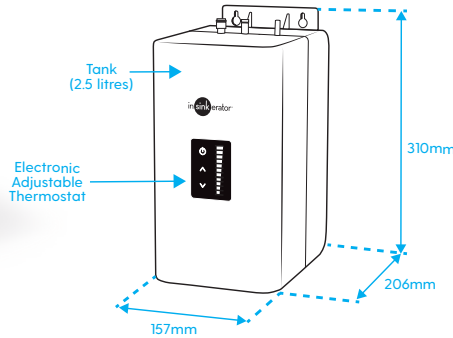

**MAINS WATER PRESSURE REQUIRED**



**WARNING:** While the MultiTap has a safety lever, please be careful when dispensing near boiling water and children should be kept away.




# NeoChiller® Specifications

in sink erator™


# NeoChiller™




- Small, compact domestic chiller unit
- Designed for easy installation under the kitchen sink
- Dispenses up to 7 litres per hour of cold, still water between 3°C and 10°C
- Filtered to remove impurities and odours, without affecting the water's natural mineral content
- Ice-bank cooling technology for optimum performance
- Standard 3-pin plug that plugs straight into a wall socket.
- CE approved




Placement guide with minimum clearances for NeoTank installation.



It is recommended to have cabinetry vented to create adequate air-flow.



**IMPORTANT NOTICE**  
Remove red plug from ICE BANK FILL port (C). Connect plastic tube to this port and the other end to the Y fitting (smaller side). Turn on water supply and fill ice bank use fill marking. When full remove plastic tube from chiller and insert plug.

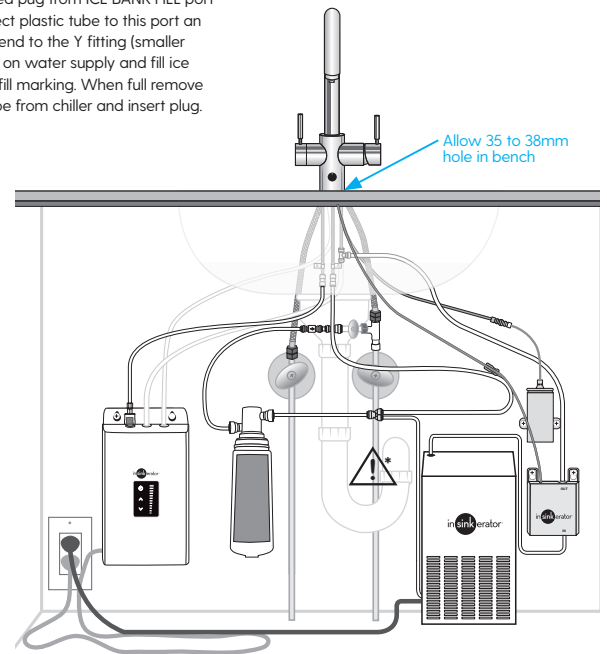

in sink erator™  
**dualtap™**

dualtap.co.nz

For more information contact Parex Industries Limited on Tel: 0800 200 510 or email: info.parex@emerson.com

InSinkEerator reserves the right to change product specifications without prior notice.