

Round Metal Project Shower Rail 4 Star Rating



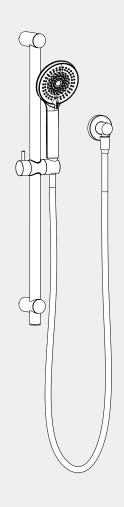

Versions:202311

Drawing



SKU

NR319

Watermark License

Temperature Rating

Min 150kpa - Max 500kpa

Specifications

Min 1°C-Max 75°C

Pressure Rating

WM-060093

Finish



Matte Black

NR319MB



Gun Metal



Brushed Nickel

Brushed Gold NR319BG

Packaging Includes


- 1x Handle Shower (Built-In Check Valve)
- 1x Shower Hose
- 1x Elbow
- 1x Shower Rail

^{*}Dimensions are nominal measurements only.

use Teflon tape



1. Put Teflon tape on outlet thread.



2. Pull dressing ring on the elbow body.




Screw elbow body on to outlet.



4. Drill two Φ 6mm holes according to above picture.




5. Mount bottom bracket on the ϕ 6 hole by expansion plug and tapping screw.

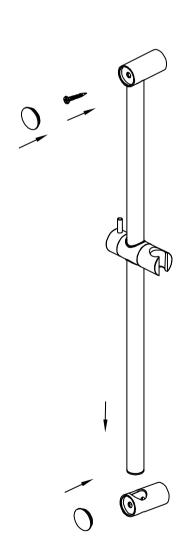


6. Plug shower rail in bottom bracket. Mount top bracket on the top hole by expansion plug and tapping screw.

Push plates onto two brackets.

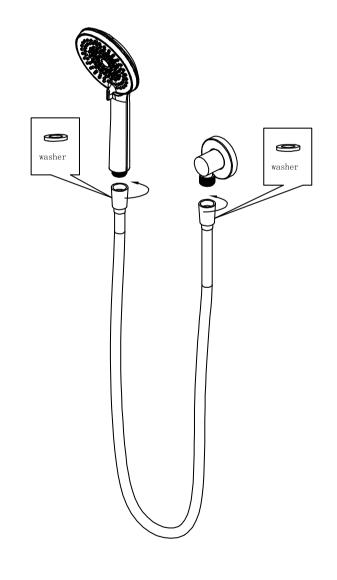

7. Connect hand shower with outlet by shower hose

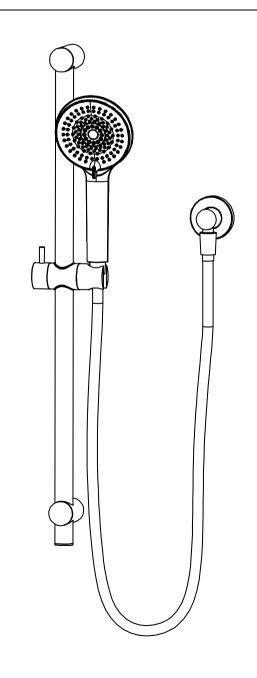

8. Test for leaks.

Nero



