


# Deluna

## Bath Spout

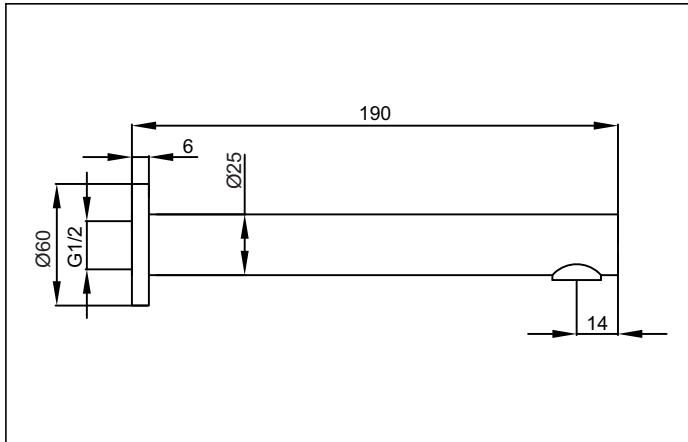

**Code:** DE BS SS | DE BS GM | DE BS CH | DE BS BLK

**Finish:** Stainless Steel | Gun Metal | Chrome | Black

**Inlet:** 1/2" BSP female supplied with 1/2" BSP male brass pipe

**Water Outlet:** M18 ring with TT size laminar flow fitted

**Installation Hole Diameter:** Minimum: 21mm

**Cover Plate:** 60mm diameter x 6mm

**Total Length:** 190mm

**Flow Control:** Max Hot @ 35kPa = 6.5 l/min  
Max Hot @ 150kPa = 13.5 l/min

**Note:** Although this spout will work on low pressures, please note that it will do so at a much reduced flow as indicated by our test where it delivered a maximum of 6.5 l/min at 35 kPa

**Note: 2 year warranty on coloured finish**

**Suitable for low/unequal & mains pressure systems**

Recommended Operational Pressure Range: 35 - 600 kPa  
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

**No WELS rating required**

aquatica



**KIWI OWNED COMPANY**

**NZ** • DESIGNED  
• ASSEMBLED  
• TESTED

**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.  
Tel: 09-828 2068,  
Fax: 09-828 2069  
Email: info@aquatica.co.nz  
or visit our website:  
[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019