


Aquatica

Sink Mixer with Pull-Out Spray

aquatica

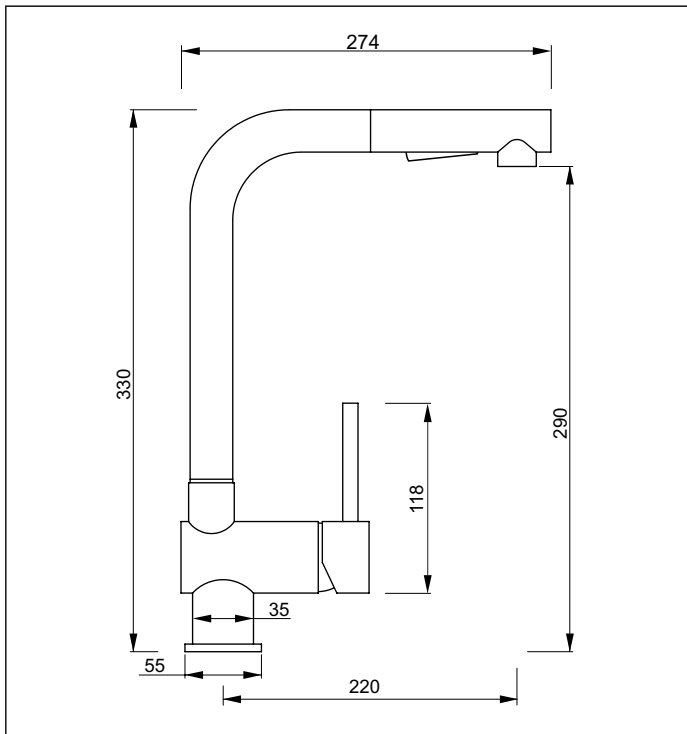

Code: AQ SMPS CP

Finish: Chrome

Spout: Swivel 360°

Water Outlet: M21 ring with Aerator or Spray Flow
Default mode - aerator

Stainless Steel Inlet Hoses: Size: M10 x 1/2" BSP

Mounting Hardware: 34mm brass tube and backnut with 2x locking screws

Installation Hole Diameter:

Minimum: 35 mm

Maximum: 40mm

Max bench thickness: 62mm

Cartridge: Mondo 40K Flat base

Flow: 8 l/min 2 x RV8 fitted in hose for regulated flow with mains pressure system

Max hot @ 35 kPa = 2.12 l/min

KIWI OWNED COMPANY

NZ

DESIGNED
ASSEMBLED
TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation