


Shower Mixer with Bath Divertor All Pressure

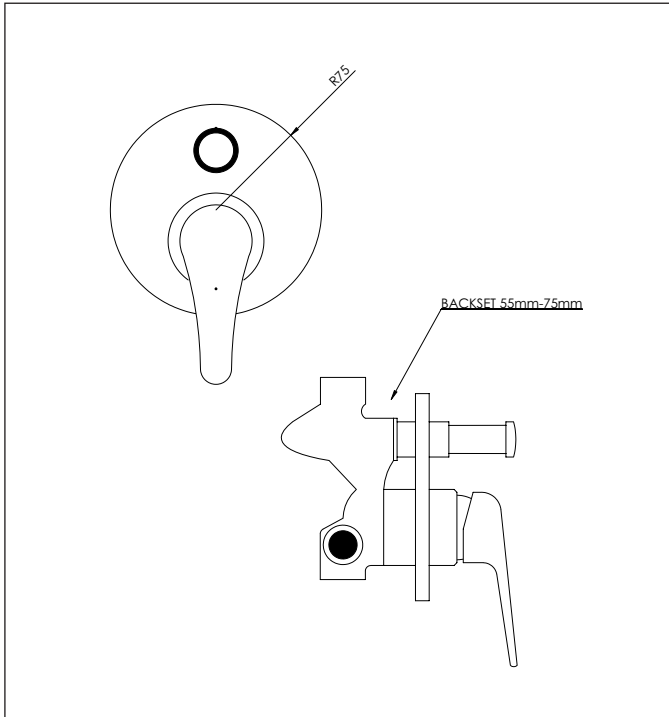

Code:	SO SHMBDAP	
Finish:	Chrome	
Barrel Diameter:	54 mm	
Divertor:		
Diameter:	25 mm	
Type:	Auto lockable	
Operation:	Pull to divert, turn to lock	
Default Outlet:	Lower 3/4" BSP Female	
Backset: (mounting board to front of lining)		
Minimum:	55 mm	
Maximum:	70 mm	
Installation Hole Size:		
Minimum:	105 x 55 mm	
Inlets:	1/2" BSP Female	
Outlets:	3/4" BSP Female	
Cartridge:	Kerox 45K Plus	Raised base
Faceplate:		
Diameter:	155 mm	
Centre to Centre:	65 mm	
WELS:	No Rating required	

Supplied with optional flow control (on cold inlet for unequal pressure systems)

All Pressures

Recommended Pressure	
Operational Range:	
Minimum:	35 kPa
Recommended:	600 kPa
Never to Exceed:	1000 kPa
Maximum Operating	
Temperature:	70°C

Aquatika Warranty

Aquatika NZ Limited offer, from the date of purchase, the following warranties:

Residential: 2 year warranty on handshowers and rain heads, 5 year warranty on tapware and accessories and a lifetime warranty on stainless steel sinks. The pull-out spray parts of our sink mixers have a 2 year warranty.

Commercial: 1 year warranty on tapware, handshowers, pull-out sprays and spray heads on sink mixer coils.

Aquatika NZ Limited warrants that only high quality workmanship and materials have been employed in the manufacture of its tapware, accessories and stainless steel products. If any workmanship or material is proven faulty during the warranty period, Aquatika NZ Limited will, at its own cost repair or, at its option replace the faulty product. Our liability will not extend to damage caused by reasonably foreseeable loss, such as inappropriate materials in a wet area, ie. floating wooden floors. The guarantee is transferable but original proof of purchase from an authorised Aquatika distributor is required. Any suspected defect must be notified to Aquatika as soon as possible after discovery and any repair work must be performed by a plumber who has received authorisation from Aquatika prior to proceeding with the work. To minimise customer inconvenience, Aquatika may immediately authorise repair work to be undertaken. However, this is not necessarily acceptance of liability.

The use of spray or abrasive cleaners of any kind will void the warranty. To remove dirt or calcium, clean with mild detergent and water, and then **thoroughly rinse** with clean water and dry with a clean soft cloth.

Failure to use an in-line strainer or filter on lines to tapware incorporating a ceramic cartridge or ceramic disc mechanism may void the warranty. Water pressure exceeding 1000 kPa will void the warranty.

Every effort has been made to show the products as they will be sold, however, all models and specifications are subject to change without notice.

Full product warranty is available on the Aquatika website.

Aquatika NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatika.co.nz
or visit our website:
www.aquatika.co.nz